

9129H

CUT 40 COMPRESSOR



Input Voltage




MCU Control System



Compressor Inside



Moisture²
Salt spray
Corrosion²

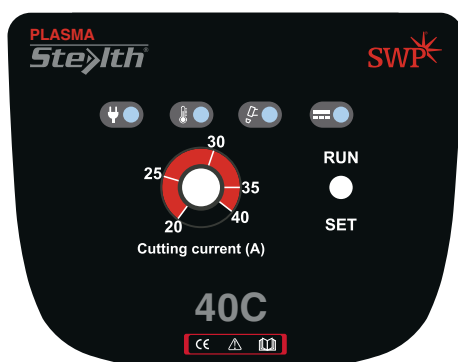

EN 60974-1:2021 (LVD)
EN 60974-10:2021 (EMC)
2019/125/EC (EER)

SPECIFICATIONS

CUT 40 COM

Power supply voltage (V)	1-phase 230V ± 10%
Power frequency (Hz)	50/60
Rated input current (A)	31.5
Rated input power (kVA)	4.7
Effective current (A)	19.9
Adjustment range of current (A)	20 - 40
Maximum no load voltage (V)	375
Duty cycle (A) (40°C 10 min)	40% @ 40A
Severance cut for carbon steel (mm)	60% @ 35A
Production cut (mm)	100% @ 25A
	≤18
	≤14
Carbon Steel	≤14
Stainless Steel	≤14
Aluminium	≤5
Copper	AF
Cooling	IP21S
Protection class	480 x 210 x 360
Dimensions (mm)	14.5
Weight (kg)	

INCLUDES



PC7100HCOM
Stealth Cut Plasma Torch

Earth Cable



Scan For Manual

*All images used are for illustrative purposes only. Individual features such as sizes, fittings and other materials' colours may vary.