

9131H CUT 60-1 CNC



Input Voltage



MCU Control System



IGBT Module



Heavy Duty Cycle



Moisture Salt spray Corrosion



Computer Numerical Control




4.3 in 480 x 272 px



Tested In Production



Phase Loss Protection

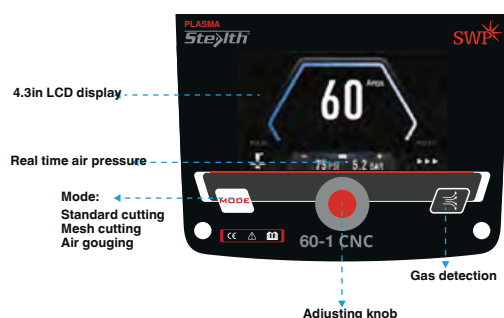

35/70mm²
ø12mm

EN 60974-1:2021 (LVD)
EN 60974-10:2021 (EMC)
2019/125/EC (EER)



SPECIFICATIONS

CUT 60-1 CNC

Power supply voltage (V)	1 - 230
Power frequency (Hz)	50/60
Effective current (A)	48
Rated input current (A)	48
Rated input power (KW)	11
Duty cycle (A) (40°C 10 min)	100%
No load voltage (V)	348
Cutting current range (A)	20 - 60
Efficiency (%)	88.7
Severance cut for carbon steel (mm)	≤35
Production cut (mm)	≤25
Carbon Steel	≤25
Stainless Steel	≤20
Aluminium	≤14
Copper	IP21S
Protection class	AF
Cooling	550 x 190 x 360
Dimensions (mm)	14
Weight (kg)	

INCLUDES



*All images used are for illustrative purposes only. Individual features such as sizes, fittings and other materials' colours may vary.



Scan For Manual