

9132H CUT 125 LCD



Input Voltage



MCU Control System



IGBT Module



Heavy Duty Cycle



Moisture
Salt spray
Corrosion



Computer Numerical Control




5.0 in 854 x 480 px



Tested In Production



Phase Loss Protection

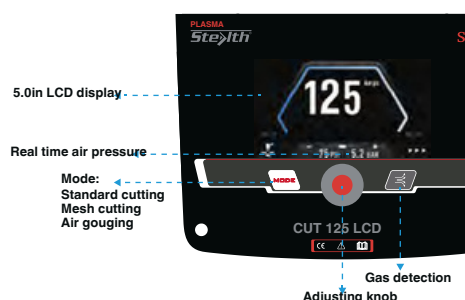

EN 60974-1:2021 (LVD)
EN 60974-10:2021 (EMC)
2019/125/EC (EER)

35/70mm²
ø12mm

SPECIFICATIONS

CUT 125 LCD

Power supply voltage (V)	3 - 400
Power frequency (Hz)	50/60
Effective current (A)	28.4
Rated input current (A)	28.4
Rated input power (KW)	19.5
Duty cycle (A) (40°C 10 min)	100% @ 105A
No load voltage (V)	320
Cutting current range (A)	20 - 105
Efficiency (%)	87.8
Power factor	0.74
Severance cut for carbon steel (mm)	≤55
Production cut (mm)	≤40
Carbon Steel	≤30
Stainless Steel	≤30
Aluminium	≤20
Copper	IP21S
Protection class	AF
Cooling	800 x 270 x 490
Dimensions (mm)	33.2
Weight (kg)	

INCLUDES



PC7200H
StealthCut Plasma Torch

Earth Cable



Scan For Manual

*All images used are for illustrative purposes only. Individual features such as sizes, fittings and other materials' colours may vary.