

9135H

MIG 300-1

4R Compact

Input Voltage

MCU Control System

LED Display


Tested In Production

Moisture Salt spray Corrosion

Generator Friendly

ø300mm (20kg)

WIRE FEEDER

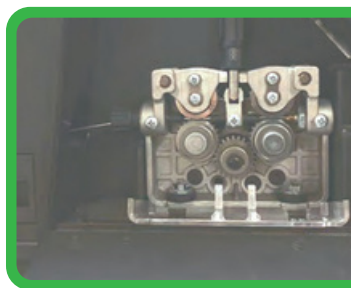

SPECIFICATIONS

MIG 300-1 4R COMPACT

Power supply voltage (V)	1 - 230 ± 10%
Power frequency (Hz)	50/60
Effective current (A)	42
Rated input current (A)	66
Rated input power (KW)	15.2
Duty cycle (A) (40°C 10 min)	40% @ 300A 60% @ 245A 100% @ 190A
Welding current range (A)	30 - 300
Welding voltage range (V)	15.5 - 29.8
Wire feeding speed (m/min)	1.5 - 18
No load voltage (V)	81
Diameter (mm)	0.6 - 1.2
Efficiency (%)	87.9
Power factor	0.66
Protection class	IP21S
Cooling	AF
Dimensions (mm)	930 x 460 x 940
Weight (kg)	48.5

INCLUDES



*All images used are for illustrative purposes only. Individual features such as sizes, fittings and other materials' colours may vary.



EN 60974-1:2021 (LVD)
EN 60974-10:2021 (EMC)
2019/125/EC (EER)