

9136H

MIG 300-1 SWF

4R

Input Voltage

MCU Control System

Tested In Production


ø300mm (20kg)

Moisture
Salt spray
Corrosion

Generator Friendly

LED Display

WIRE FEEDER

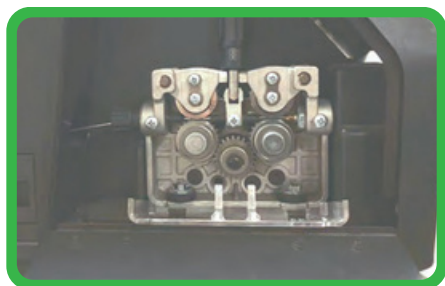

SPECIFICATIONS

MIG 300-1 SWF	
Power supply voltage (V)	1 - 230 ± 10% 50/60
Power frequency (Hz)	42
Effective current (A)	66.6
Rated input current (A)	15.2
Rated input power (KW)	30 - 300
Welding current range (A)	15.5 - 29.0
Welding voltage range (V)	81
No load voltage (V)	40% @ 300A 60% @ 245A
Duty cycle (A) (40°C 10 min)	100% @ 190A 0.6 - 1.2
min) Diameter (mm)	86.5
Efficiency (%)	0.66
Power factor	IP21S
Protection class	1290 x 460 x 1300
Dimensions (mm)	57.9
Weight (kg)	

INCLUDES



*All images used are for illustrative purposes only. Individual features such as sizes, fittings and other materials' colours may vary.



EN 60974-1:2021 (LVD)
EN 60974-10:2021 (EMC
2019/125/EC (EER)

CE

