

Two Stage Fabmaster Elite Regulator 2 Gauge Nitrogen 10 Bar – HL060022

Key Features:


- Unique economic colour coded PA Knob
- 2 years warranty.
- 300 bar service.
- Available in bottom & side entry.
- High contrast, easy to read gauges.
- Alloy bonnet for high strength.
- Manufactured under BS EN ISO 9001.
- Conforms to BS EN ISO 2503



Technical Data:

Specification	
Inlet Connection Arrangement	6 O'clock
Inlet Connection Length	80mm
Inlet Connection Size	G5/8 BSP RH Bull Nose
Outlet Connection Arrangement	4 O'clock
Outlet Connection Size	G3/8 RH
LP Relief Valve Arrangement	3 O'clock
HP Relief Valve Arrangement	8 O'clock
Inlet Pressure	230 Bar
Outlet Pressure setting	10 Bar
Weight	
Material	
Body	Brass
Bonnet	Zinc Alloy
Piston	
Seal	
Valve Seat	Modified PTFE
Filter	

Flow Data:

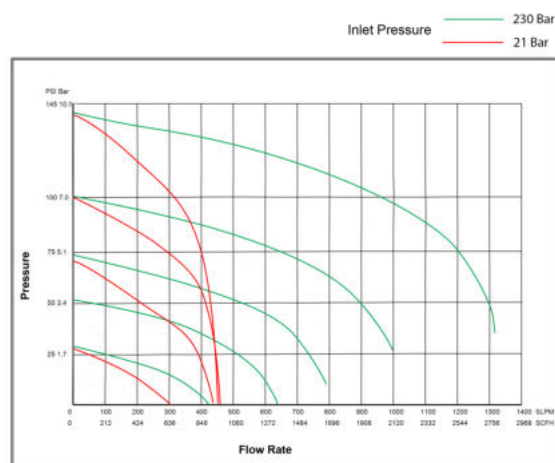

*FLOW TAKEN UNDER STANDARD WORKING TEMPERATURE OF 25°C (±1.5°C) USING OIL FREE BREATHABLE COMPRESSED AIR, WITH DIGITAL FLOW DEVICE (SERIAL NO.80743) CALIBRATED TO FULL SCALE PRESSURE 160PSIA WITH AN ACCURACY OF ±1.0% OF FULL SCALE PRESSURE.