



Selected by Professionals

Stealth

WELDING MACHINES PRODUCT INFORMATION

- MCU Control System
- Input Voltage
110-230V
50/60HZ
- Power Factor Correction
0.99
- Optional Foot Control
- Optional Potentiometer Remote Control Torch
- Dual Pulse
- Optional Up/Down Remote Control Torch
- 5A
- Generator friendly

9011H DIGI-TIG 200 AC/DC PULSE PFC MV

110V-230V

PRODUCT SUMMARY


A versatile 200 amp AC/DC machine that welds all forms of materials including aluminium. A dual voltage machine with Power Factor Control and the ability to connect a foot switch.

FEATURES

- Full digital control panel
- 0.5 - 200 pulse frequency
- Multi AC wave form choices
- Welds all forms of steels – including aluminium

OPTIONAL EXTRAS

- 9827H** Air-Cooled Tig package
- 9828H** Water-Cooled Tig package
- ET26-12SZ** Tig Torch
- D3595-1-1** Tig Adaptor

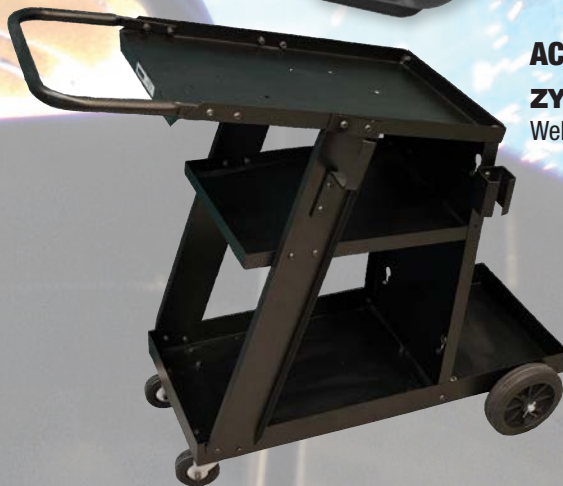

ACCESSORIES

ZYFUTWELDCART
Welding Trolley



9826H Foot Switch

SPECIFICATIONS

Input power voltage	110±10%		230±10%	
AC/DC	+MMA	+TIG	+MMA	+TIG
Effective input current – AC (A)	20	26	22	16
Effective input current – DC (A)	21	27	19	12
Maximum (KVA)	4.2		7.4	
Input voltage frequency (Hz)	50/60			
No load voltage (V)	68			
	MMA	TIG	MMA	TIG
Current adjustment range (A)	5-130	5-160	5-200	5-200
	MMA	TIG	DC	AC
Duty cycle (A) (40°C 10 min)	30% @ 130		35% @ 200	
	60% @ 110	60% @ 160	60% @ 140	60% @ 200
	100% @ 80	100% @ 125	100% @ 110	100% @ 155
Protection class	Ip23			
Insulation class	H			
Slope out (S)	0-10			
Pulse width range (%)	5-95			
Pre-gas time adjustment range (S)	0.1-10			
Post-gas time adjustment range (S)	0-10			
Overall dimensions (mm)	545 x 190 x 355			
Weight (kg)	15			
Accessories included	3m Argon hose, Amphenol plug, 3m earth return lead			

USE OUR SUPER 6 TIG RODS



A18	4043	316
7362 1.6mm	7047 1.6mm	7224 1.6mm
7363 2.4mm	7048 2.4mm	7225 2.4mm



SCAN HERE FOR SWP WEBSITE

