

## Two Stage Fabmaster Elite Regulator 2 Gauge Nitrogen 10 Bar Side Entry Spanner Tight Nevoc– HL060068

### Key Features:


- Unique economic colour coded PA Knob
- 2 years warranty.
- 300 bar service.
- Available in bottom & side entry.
- High contrast, easy to read gauges.
- Alloy bonnet for high strength.
- Manufactured under BS EN ISO 9001.
- Conforms to BS EN ISO 2503



### Technical Data:

| Specification                 |               |
|-------------------------------|---------------|
| Inlet Connection Arrangement  | 9 O'clock     |
| Inlet Connection Length       | 110mm         |
| Inlet Connection Size         | BS341 No30    |
| Outlet Connection Arrangement | 4 O'clock     |
| Outlet Connection Size        | G3/8 RH       |
| LP Relief Valve Arrangement   | 3 O'clock     |
| HP Relief Valve Arrangement   | 7 O'clock     |
| Inlet Pressure                | 300 Bar       |
| Outlet Pressure setting       | 10 Bar        |
| Weight                        |               |
| Material                      |               |
| Body                          | Brass         |
| Bonnet                        | Zinc Alloy    |
| Piston                        |               |
| Seal                          |               |
| Valve Seat                    | Modified PTFE |
| Filter                        |               |

### Flow Data:

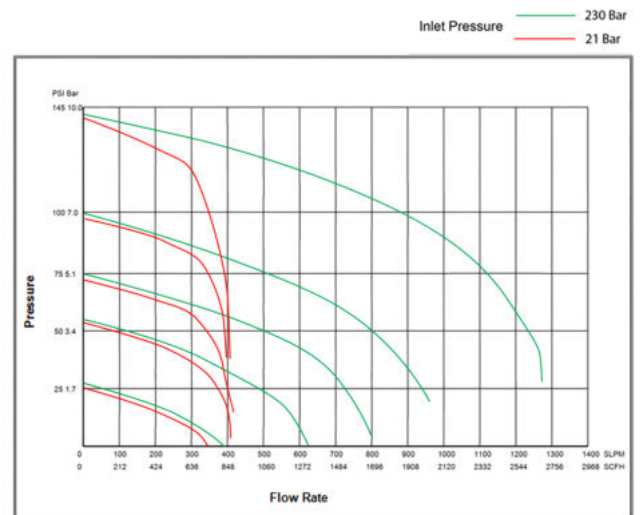

\*FLOW TAKEN UNDER STANDARD WORKING TEMPERATURE OF 25°C ± 1.5°C USING OIL FREE BREATHABLE COMPRESSED AIR, WITH DIGITAL FLOW DEVICE (SERIAL NO.80763) CALIBRATED TO FULL SCALE PRESSURE 160PSIA WITH AN ACCURACY OF ± 0.5% OF FULL SCALE PRESSURE.